



conveyor products

HP Type Belt Cleaner

- **BELT WIDTHS**

Belle Banne HP Type belt cleaner is suitable for all belt widths from 400 mm – 3000 mm.

- **REVERSING CONVEYORS**

The Belle Banne H type belt cleaner can be used on reversing belts. Install one at either end, or one at the primary discharge end of your conveyor.

- **HEAVY DUTY CONSTRUCTION**

Belle Banne cleaner poles are the strongest around. All poles are schedule 80 material, ensuring they are fit for tough mining applications. Heavy Duty Cushions and Suspension arms are available on request for tough applications.

- **STAINLESS STEEL**

Belle Banne cleaners are available in either powder coated mild steel, or 304 stainless steel. 316 grade available on request.

CONTACT US


Mail: PO Box 403 Ingleburn NSW 1890
Address: 7 Phiney Place Ingleburn NSW 2565

Phone: + 61 2 9618 9400
Email: info@bbcp.com.au



www.bbcp.com.au
www.facebook.com/BBConveyorProducts

ABN 12 137 362 497

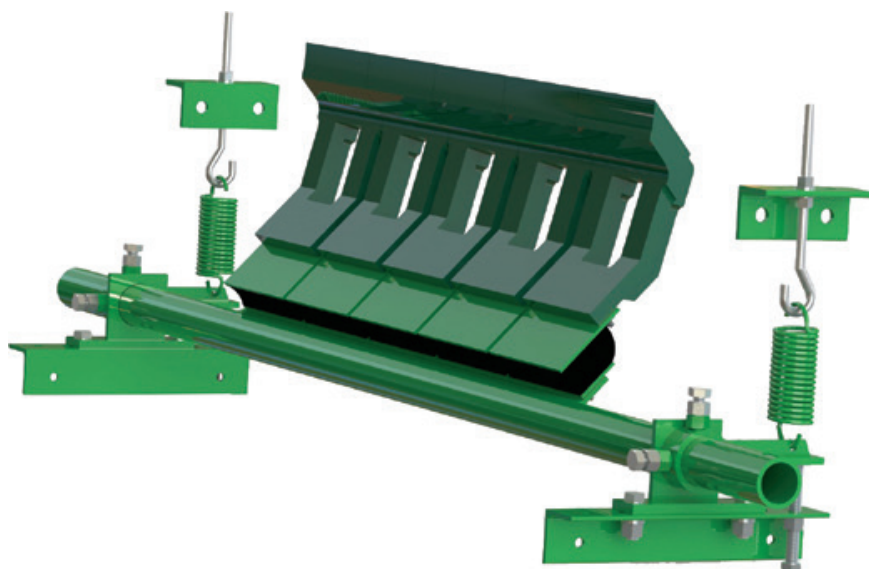


- **SEGMENTED BLADES**

The Belle Banne HP type Belt cleaner has been the leader in belt cleaning technology for more than 30 years.

The original HP type cleaner was developed by Belle Banne as a primary belt cleaner suitable for demanding applications.

Whether it is the only cleaner in use on a conveyor, or the first in a high performance cleaning system, the Belle Banne HP type belt cleaner should be your first choice.

Available in all sizes to suit your belt width, and in a range of materials to optimise life and performance, the Belle Banne HP Type belt cleaner provides multiple options to suit your cleaning needs.

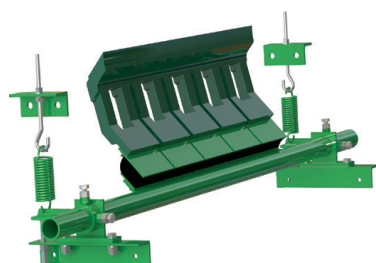

The HP type belt cleaner consists of individual 200 mm segmented blades, each one mounted on a rubber cushion. Separate blades ensure constant blade to belt contact on uneven surfaces, guaranteeing maximum cleanliness.

- **LONG LASTING URETHANE**

Belle Banne has long been the leader in its class when it comes to urethane. Our urethane has a proven track record for consistent wear and long blade life. No other urethane blade comes close.

- **OPTIMAL POSITION**

The HP type is positioned on the head, or discharge pulley, and sits out of the flow of regular material in the conveyor chute or transfer, ensuring the cleaner does not become bogged in material.

5 different suspension arm sizes are available to match your pulley diameter, and make certain that the cleaner is positioned correctly for optimum performance every time.



conveyor products



HP Type Belt Cleaner Ordering Information

| Belt (mm) | Tip (mm) | Pole Lgth (mm) | Pole Diam (mm) | Arm Size (see table) | MILD STEEL | | STAINLESS STEEL | | Wgt (kgs) |
|-----------|----------|----------------|----------------|----------------------|------------|-----------------|-----------------|---------------------|-----------|
| | | | | | Item Code | Ordering Number | Item Code | Ordering Number | |
| 450 | 400 | 1400 | 60 | SS | 112001 | HPBB450x400SS | 117001 | HPBB450x400SS-304 | 35 |
| | | | | S | 112002 | HPBB450x400S | 117002 | HPBB450x400S-304 | |
| | | | | M | 112003 | HPBB450x400M | 117003 | HPBB450x400M-304 | |
| 750 | 600 | 1600 | 60 | SS | 112004 | HPBB750x600SS | 117004 | HPBB750x600SS-304 | 42 |
| | | | | S | 112005 | HPBB750x600S | 117005 | HPBB750x600S-304 | |
| | | | | M | 112006 | HPBB750x600M | 117006 | HPBB750x600M-304 | |
| 900 | 800 | 1900 | 60 | SS | 112007 | HPBB900x800SS | 117007 | HPBB900x800SS-304 | 49 |
| | | | | S | 112008 | HPBB900x800S | 117008 | HPBB900x800S-304 | |
| | | | | M | 112009 | HPBB900x800M | 117009 | HPBB900x800M-304 | |
| 1050 | 1000 | 2000 | 60 | SS | 112010 | HPBB1050x1000SS | 117010 | HPBB1050x1000SS-304 | 62 |
| | | | | S | 112011 | HPBB1050x1000S | 117011 | HPBB1050x1000S-304 | |
| | | | | M | 112012 | HPBB1050x1000M | 117012 | HPBB1050x1000M-304 | |
| 1200 | 1200 | 2600 | 60 | SS | 112013 | HPBB1200x1200SS | 117013 | HPBB1200x1200SS-304 | 63 |
| | | | | S | 112014 | HPBB1200x1200S | 117014 | HPBB1200x1200S-304 | |
| | | | | M | 112015 | HPBB1200x1200M | 117015 | HPBB1200x1200M-304 | |
| | | | | L | 112016 | HPBB1200x1200L | 117016 | HPBB1200x1200L-304 | |
| 1500 | 1400 | 2800 | 73 | SS | 112017 | HPBB1500x1400SS | 117017 | HPBB1500x1400SS-304 | 77 |
| | | | | S | 112018 | HPBB1500x1400S | 117018 | HPBB1500x1400S-304 | |
| | | | | M | 112019 | HPBB1500x1400M | 117019 | HPBB1500x1400M-304 | |
| | | | | L | 112020 | HPBB1500x1400L | 117020 | HPBB1500x1400L-304 | |
| 1600 | 1600 | 3000 | 73 | S | 112021 | HPBB1600x1600S | 117021 | HPBB1600x1600S-304 | 82 |
| | | | | M | 112022 | HPBB1600x1600M | 117022 | HPBB1600x1600M-304 | |
| | | | | L | 112023 | HPBB1600x1600L | 117023 | HPBB1600x1600L-304 | |
| 1800 | 1800 | 3200 | 73 Braced | S | 112024 | HPBB1800x1800S | 117024 | HPBB1800x1800S-304 | 107 |
| | | | | M | 112025 | HPBB1800x1800M | 117025 | HPBB1800x1800M-304 | |
| | | | | L | 112026 | HPBB1800x1800L | 117026 | HPBB1800x1800L-304 | |
| 2100 | 2000 | 3400 | 73 Braced | M | 112027 | HPBB2100x2000M | 117027 | HPBB2100x2000M-304 | 112 |
| | | | | L | 112028 | HPBB2100x2000L | 117028 | HPBB2100x2000L-304 | |
| 2500 | 2400 | 3800 | 73 Braced | M | 112030 | HPBB2500x2400M | 117030 | HPBB2500x2400M-304 | 122 |
| | | | | L | 112031 | HPBB2500x2400L | 117031 | HPBB2500x2400L-304 | |
| 3000 | 3000 | 4400 | 73 Braced | M | 112033 | HPBB3000x3000M | 117033 | HPBB3000x3000M-304 | 145 |
| | | | | L | 112034 | HPBB3000x3000L | 117034 | HPBB3000x3000L-304 | |

Poly Arm Size Guide

Non-stock

| Pulley Diameter Including Belt | Arm Size |
|--------------------------------|----------|
| Up to 500 mm | SS |
| 500 - 800 mm | S |
| 800 - 1000 mm | M |
| 1000 - 1200 mm | L |

Over 12000mm contact BBP

WHERE IS IT USED?

- Coal
- Iron ore
- Hard rock
- Heavy metals
- Sand and gravel
- Recycling
- Steel mills
- Power gen

The Belle Banne HP type can remove up to 85% of your carry back, or up to 97% when used with a secondary cleaner – ask us how.